

Overview

The Shure PA411 Antenna Combiner distributes DC power and RF signal for up to four Shure PSM®300 transmitters. The compact half-rack system significantly reduces the amount of antennas and power supplies needed when using multiple systems.

- Wideband 470 to 865 MHz frequency range
- Main RF output connects to standard ¼ wave PSM antenna
- RF LED Indicators display signal present, signal overload per input
- Power output distributes DC power to PSM transmitters (accessory power cable required)
- Front panel power switch

Product Specifications


Power Requirements	15 VDC
DC Output	12 VDC (x4)
Output Current <i>Combined total from all DC outputs</i>	1.4 A, maximum
Operating Temperature Range	-18 °C to 63 °C
Dimensions	42 × 177 × 198 mm H × W × D
Net Weight	1.62 kg

RF INPUT


Connector Type	BNC
RF Frequency Range	470 to 865 MHz
Maximum Input Level	20 dBm Per Channel
Input Port Isolation	50 dB, typical
RF Input Power Operating Range <i>Per Channel</i>	4.5 to 15 dBm
LED Indicator Minimum Detection Threshold	3 dBm ± 1 dB
RF Overload LED Threshold	17.5 dBm ± 1 dB
Impedance	50 Ω

RF OUTPUT

RF Frequency Range	470 to 865 MHz
Output Intercept Point (OIP3)	48 dBm, typical
Connector Type	BNC
Impedance	50 Ω
Reverse Isolation <i>Output to Input</i>	40 dB, typical
Gain <i>Input to any Output Port</i>	-5 to 0 dB

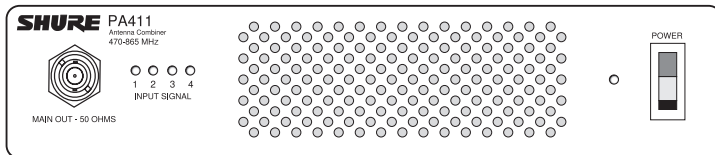

PA411 Front Panel

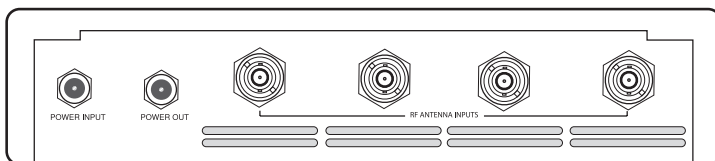

PA411 Back Panel

SHURE[®]
LEGENDARY
PERFORMANCE™

Europe, Middle East, Africa:
Shure Europe GmbH
Jakob-Dieffenbacher-Str. 12,
75031 Eppingen, Germany

Phone: +49-7262-92490
Fax: +49-7262-9249114
Email: info@shure.de
www.shure.eu