

# DATA SHEET

## QT® EMITTER MOUNTING ACCESSORIES



### UNIVERSAL BRACKET

SKU: AE-UB-W (white), AE-UB-B (black)

For mounting the emitter to a wall or ceiling. Rotates in 45-degree increments for optimal sound dispersion. Ships with screws and screw anchors. Compatible with both Qt Active Emitter and Qt Standard Emitter.

### DIMENSIONS:

**Cylinder length:**

4" (10.16 cm)

**Cylinder diameter:**

3.5" (8.89 cm)

**Bracket width:**

3.75" (9.53 cm)

**Bracket height:**

3.625" (9.21 cm)

**Bracket length:**

2.5" (6.1 cm)

**Weight:**

3.9 oz. (110.56 g)



### BEAM BRACKET

SKU: AE-BB-W (white), AE-BB-B (black)

For mounting the emitter to exposed I-beams or trusses. Ships with bolt for attaching clamp to cylinder and for attaching clamp to beams. Compatible with both Qt Active Emitter and Qt Standard Emitter.

### DIMENSIONS:

**Cylinder length:**

4" (10.16 cm)

**Cylinder diameter:**

3.5" (8.89 cm)

**Clamp opening:**

.95" (2.4 cm)

**Clamp width:**

.94" (2.39 cm)

**Clamp height:**

1.5" (3.81 cm)

**Clamp length:**

1.75" (4.45 cm)

**Weight:**

4.2 oz. (119.07 g)



### PENDANT MOUNT

SKU: PM-W (white), PM-B (black)

Offers a simple and attractive way to install Qt Active or Standard Emitters in an open or raised ceiling space and suspends them at the optimum height for best coverage. Includes pendant mount top and cylinder, cable, and cable box cover assembly.

### DIMENSIONS:

**Height:**

7" (17.8cm)

**Diameter:**

3.3" (8.4cm)

**Hanging Weight:**

12 oz. (340g)

**Mounts to:**

4" octagonal electrical ceiling box

**Cable:**

4 wire UTP, 24 AWG



### DRYWALL MOUNT

SKU: DM

For mounting the emitter into drywall ceilings. Compatible with both Qt Active Emitter and Qt Standard Emitter.

### DIMENSIONS:

**Cylinder length:**

2.1" (5.4 cm)

**Cylinder diameter:**

3.5" (8.9 cm)

**Weight:**


1.2 oz. (34 g)

**Max. drywall depth:**

0.75" (1.9 cm)

**Material:** PC/ABS

**Color:** White

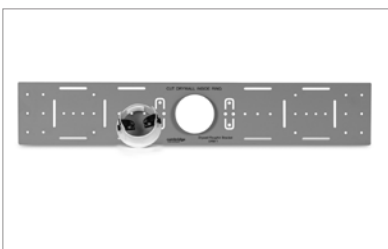

### DRYWALL ROUGHIN BRACKET

SKU: DRB-1

For installing with holes left for cables and Qt® Emitters before the drywall ceiling is hung. Slats make the bracket easier to fold and fit into joists and holes are included to help nail or screw it in place. Tabs fold up to hold emitter in place. Specify DRB-1 Kit to get the Drywall Roughin Bracket with the Drywall Mount (DM).

### DIMENSIONS:

**Height:**

.375" (.953 cm)

**Length:**

28" (71.12 cm)

**Width:**

5" (12.7 cm)

**Weight:**

1.41 lb. (639.57 g)



### CEILING CONDUIT MOUNT (4-PACK)

SKU: CCM-1

For mounting the emitter into acoustic ceiling tile or drywall in regions with special fire and/or conduit requirements. Ceiling tile and drywall mounting rails included. Compatible with Qt Standard and Qt Active emitters.

### SPECIFICATIONS:

**Enclosure Dimensions (H x**

**W x D):** .5" x 4.9" x 5.1" (14 cm x 12.5 cm x 12.95 cm)

**Weight:** enclosure: 2.43 lbs.

(1.1 kg); ceiling tile rails: 1.26

lbs./pair (.57 kg); drywall

rails: 1.01 lbs./pair (.45 kg)

**Knockouts:** 9 double-tap

**Knockout Diameter:** 7/8" (2.22 cm)

**Mounting Rails:** 2'

**Material:** Galvanized steel

**Color:** Silver