


Article No. : 5698695

Description : Converter HDMI > VGA+ RL Audio+RGB+SPDIF



Front Panel:

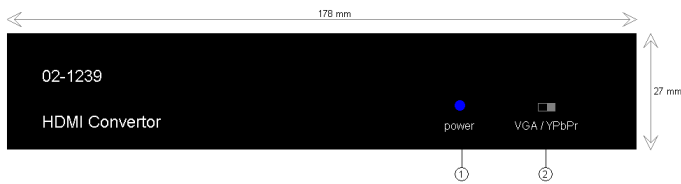


- ① Power LED
- ② VGA/YPbPr Switch

Back Panel:



- ① Power input
- ② HDMI input
- ③ YPbPr output
- ④ VGA output
- ⑤ Audio L/R output
- ⑥ SPDIF Audio output

Typical Application

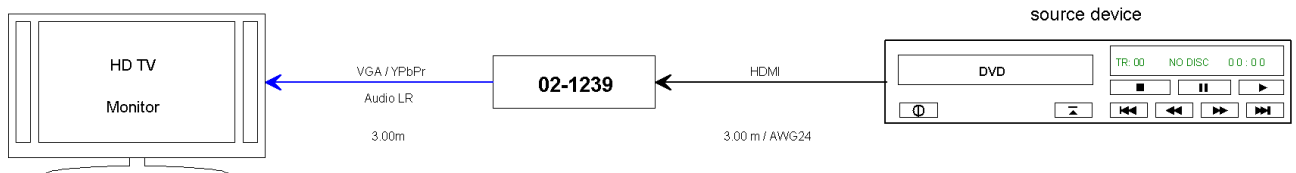

Specification:

HDMI resolution	: HDMI 1.2a
Input video signal	: 0.5 ~ 1.5 Volt p-p
Input DDC signal	: 5 V p-p (TTL)
VGA ore YPbPr output	: support uo to UXGA and 1080I (60Hz)
Audio output	: L / R analog + Optical (SPDIF)
Max. transmission bandwidth	: 5.1 Gbps
Max. working current	: 600 mA
Power adaptor	: input: 100-240 Vac / Output: 5Vdc 800mA
Operation temperature range	: -15°C to +55°C
Operation humanity range	: 5 to 90%RH (No condensation)
Dimension (L x H x W)	: 178 x 28 x 65 mm
Weight	: 370 Gr (exl. Power adaptor and packing)