



Technische Informationen

Engineering Data Sheet

PSE 215

15" Subwoofer Extension Cabinet

Features:

- Power Handling Rated 500 W / Peak 2000 W
- 1 x 15" DVX-3159A Woofer
- Designed for extending a PSD 215 Powered Subwoofer
- Foot recesses for secure stacking of multiple units
- Large wheels make transport easy

	PSE 215
Order No.	F01U215171
Cabinet	Subwoofer
Nominal impedance	8 Ohms
Rated Power RMS	500 W
Program power	1000 W
Peak Power	2000 W
Sound pressure level	
SPL 1 W / 1 m (half-space environment)	98 dB
Max. SPL 1 m (calculated with peak power, half-space environment)	131 dB
Frequency Range (-10 dB)	40 Hz to 160 Hz
Nominal Coverage Angle (Horizontal x Vertical)	Omnidirectional
LF Transducer	DVX-3159A
Connectors	2 x Neutrik Speakon NL4 Sub 1+ / 1- Wired Through 2+ / 2-
Dimensions (W x H x D)	640 mm x 465 mm x 694 mm
Net Weight	33.8 kg (74.4 lb)
Enclosure material	15 mm Multi-ply wood
Finish	Black, scratch-resistant
Grille	Powder coated steel
Wheels	4
Handles	2
Thread plate for distance piece	M20
Warranty	5 years
Optional Accessories	
Dust Cover	SH-PSD-E 215: F01U215173
Spare Parts	
LF Transducer	F01U247961



Wir weisen ausdrücklich darauf hin, dass bei gehängten Lautsprecherboxen die einschlägigen Sicherheitsbestimmungen zu beachten sind. Es muss unbedingt qualifizierte Fachberatung in Anspruch genommen werden!

We expressly point out that the relevant safety regulations must be observed for "flying" loudspeaker systems. It is imperative that qualified expert advice is sought.

WARNING:

**THIS LOUDSPEAKER SYSTEM CAN PERMANENTLY DAMAGE HEARING!
USE EXTREME CARE WHEN SETTING SOUND PRESSURE LEVELS!**

DANGER:

CONSULT A CERTIFIED STRUCTURAL ENGINEER BEFORE ANY ATTEMPT TO SUSPEND THIS LOUDSPEAKER! LOUDSPEAKER CAN FALL FROM IMPROPER SUSPENSION, RESULTING IN SEVERE INJURY AND DAMAGE OF PROPERTY. DO NOT SUSPEND OR MOUNT ANY OTHER PRODUCT OR DEVICE FROM THIS LOUDSPEAKER ENCLOSURE! USE GRADE 5 HARDWARE OR BETTER ONLY!

Description

The PSE 215 is the non-powered version of the PSD 215 powered subwoofer, lacking the power amplifier module and DSP controller of its active counterpart. It shares the same dimensions, the same transducer configuration, and the same acoustic characteristics, however, making it the ideal companion for the PSD 215. The PSE 215 may also be used as a subwoofer in any other active system combination.

Beschreibung

Der PSE 215 ist die Variante des PSD 215-Subs ohne Verstärker-Modul und ohne DSP-Controller. Er hat die gleichen Abmessungen, gleiche Bestückung und gleiche akustische Eigenschaften, was ihn zur idealen Erweiterung eines PSD 215 macht. Der PSE 215 kann natürlich auch in anderen aktiven System-Kombinationen problemlos als Subwoofer eingesetzt werden.

Illustration 1: Dimensions


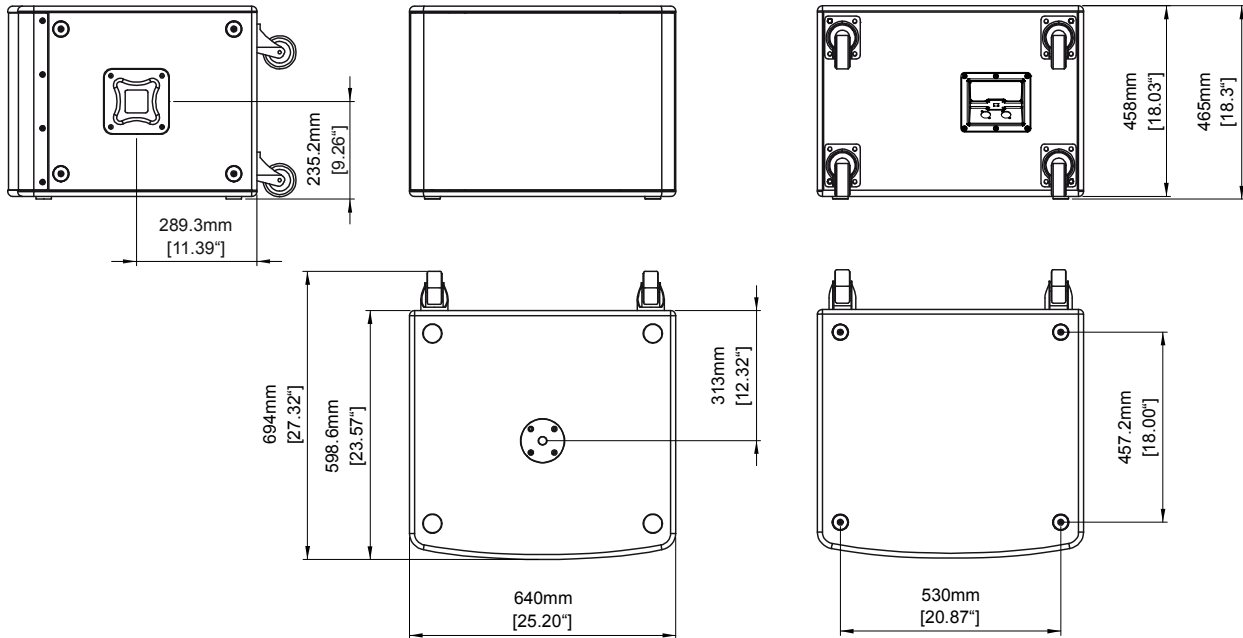


Illustration 2: Frequency Response

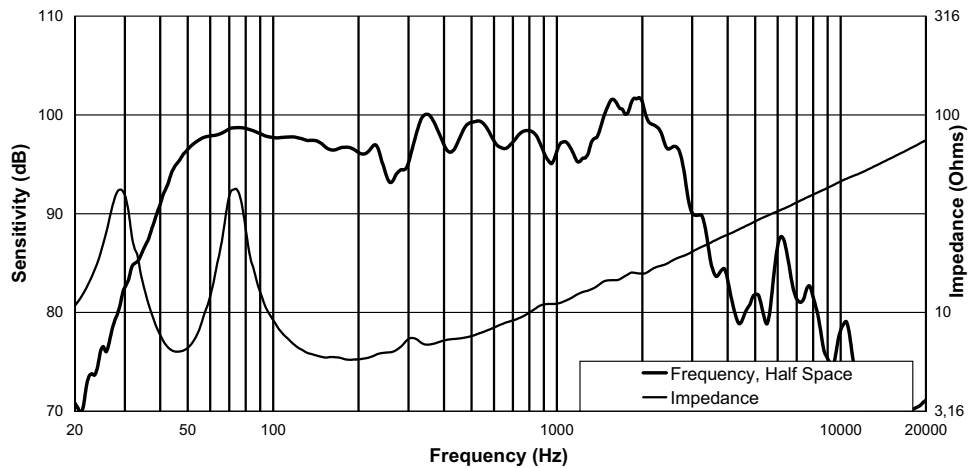

12000 Portland Avenue South, Burnsville, MN 55337, USA
Phone: +1 952/844-4051, Fax: +1 952/884-0043

www.dynacord.com

© Bosch Communications Systems 03/2012
Part Number F01U257805 Vs 01

Europe, Africa, and Middle East only. For customer orders, contact Customer Service at: **+49 9421-706 0 Fax: +49 9421-706 265**

Asia & Pacific only. For customer orders, contact Customer Service at: **+65 6571 2534 Fax: +65 6571 2699**

For technical assistance, contact Technical Support at: **+49 9421-706 0**

Specifications subject to change without notice.