

QUADCOLOR MINI PAR

COMPACT RGBW FIXTURE

SOLID IP65 HOUSING

- 30° BEAM ANGLE
- SOLID HOUSING
- IP65
- DOUBLE BRACKET FOR FLOOR AND TRUSS MOUNTING
- 'FLICKER FREE' OPERATION
- INTENSE COLORS DUE TO SPECIALLY SELECTED LEDs
- CLEAR MENU STRUCTURE FOR OPERATION SETTINGS



Flux out: 607.8 lm


Height	Eavg,Emax	Angle: 30°	Diameter
3m	44.20,77.84fc 475.8,837.8lx		123.71cm
4m	24.86,43.78fc 267.6,471.3lx		164.94cm
5m	15.91,28.02fc 171.3,301.6lx		206.18cm
6m	11.05,19.46fc 118.9,209.5lx		247.42cm
7m	8.119,14.30fc 87.39,153.9lx		288.65cm



The CLF Quad Color Mini PAR is a compact RGBW LED fixture with an impressive output for in- and outdoor use. The Quad Color mini PAR offers deep saturated, intense colors due to the specially selected LEDs and with the inserted white LEDs it is possible to create a huge range of colors. The powerful LEDs provide extremely high output and ensures 'flicker-free' operation for all types of TV and camera use.

The fixture comes with a 30° beam angle which is perfect for illuminating large surfaces and can also be used for effect lighting. The solid housing of the fixture makes it suitable for every rental stock and fixed installations. Besides DMX control, the fixture can also be controlled stand alone or in master / slave mode. The Quad Color Mini PAR comes with pre-programmed macros.

The fixture has a double bracket so it can be placed on the floor or mounted to truss structures by using the unique CLF quicklock system. This hanging system is easy to use and time-saving. The Quadcolor Mini PAR is equipped with waterproof cables to ensure an IP65 rating and adapters to schuko and XLR are included. An optional barndoor is also available.

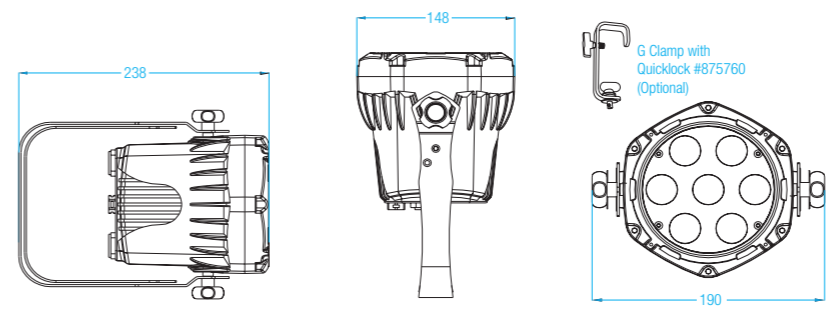

FACTSHEET	
DMX channels	3, 4, 5, 6 or 11 channels
Beam angle	30°
Power supply	100 - 240 VAC
Power consumption	Max. 56 Watt
Cooling	Convection
DMX connection	3p XLR in & out
Dimensions	190 x 148 x 238 mm (lxwxh)
Weight	2,5 Kg
Certification	CE, RoHS
Item number	156120
Included items	Power cable schuko - IP65 DMX cable XLR3 male & female - IP65
IP rating	IP65
Optional accessoires	Barndoor