

Live For Sound

Bang
for the Buck.

Rumble
for the Euro.

Punch
for the Pound.

SB122
subwoofer

The quest for an affordable subwoofer that is compact, lightweight AND powerful is finally over. Introducing the Electro-Voice SB122, quite possibly the smallest, most powerful subwoofer on the planet. Don't let your eyes fool you into thinking this little sub can't pound. Packing 400 watts continuous (1600W peak) in a diminutive 15kg (33lbs) package, the SB122 employs the new EVS12SB 12-inch long-excursion woofer for outstanding low frequency response.

Aesthetically, the SB122 sports a half-face grille with grille cloth, and a newly stylized EV logo. The rich feature set includes a top mounted pole cup, ergonomic carrying handle, large port, and a built-in low-pass filter that eliminates the need for external processing. Of course, external processing is still an option for professionals seeking greater overall system performance gains. And, with a price that makes it all seem too good to be true, SB122 is sure to make you rethink what a compact sub can be.

Live For Sound
www.electrovoice.com



SB122

subwoofer


Key Features:

- Very Compact and Lightweight -- Only 33 lbs/15.0 kg
- Integral handle
- 400 Watt continuous, 1,600 Watt peak power handling
- Parallel Neutrik Speakon high current input connectors
- Cast frame EVS12SB 12-inch high excursion subwoofer driver
- Integral low-pass filter -- No additional amplifier or processor needed



SB122 complements a wide variety of Electro-Voice® products including, but not limited to, ZX, SX, and even the EVID® installation series. For even greater flexibility, SB122 is available in black and white, and in permanent installation versions (PI), and 70v/100v transformer versions (PIX).

Frequency Response:

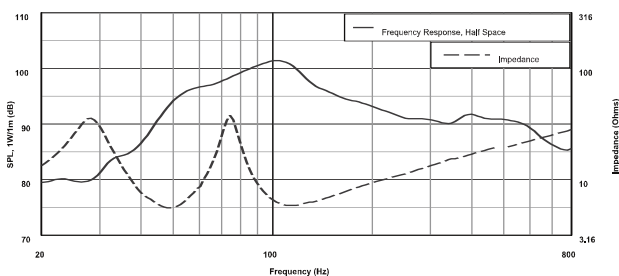

Americas—Headquarter Americas

Telex Communications Inc.
12000 Portland Ave South,
Burnsville, MN 55337, USA

USA— Ph: 1-800-392-3497
Fax: 1-800-955-6831

Canada— Ph: 1-866-505-5551
Fax: 1-866-336-8467

Latin America— Ph: 1-952-887-5532
Fax: 1-952-736-4212

Europe, Africa & Middle-East

Headquarter EAME
EVI Audio GmbH,
Hirschberger Ring 45, D-94315,
Straubing, Germany
Phone: +49 9421 706-0, Fax: +49 9421 706-265

France: EVI Audio France S.A.,
Parc de Courcerin,
Allée Lech Walesa,
F 77185 Lognes, France
Phone: +33 1-6480-0090
Fax: +33 1-6006-5103

UK: Shuttlesound,
4 The Willows Centre,
Willow Lane, Mitcham,
Surrey CR4 4NX, UK
Phone: +44 208 646 7114
Fax: +44 208 254 5666

Freq. Response ¹ (-3 dB):	52 Hz – 145 Hz
Freq. Response ¹ (-10 dB):	43 Hz – 200 Hz
Recommended High-Pass Frequency:	40 Hz
Sensitivity ¹ (SPL 1W/1m):	99 dB
Max Calculated SPL:	131 dB
Power Handling (Cont.):	400 Watts
Power Handling (Peak):	1,600 Watts
LF Transducer:	EVS12SB, 12 in (305mm)
Recommended Crossover Frequency Range:	80 Hz – 160 Hz
Impedance:	8 Ohms
Connectors:	(2) Neutrik Speakon NL4
Dim (H x W x D):	23.1" x 16.9" x 12.3" (586mm x 429mm x 312mm)
Net Weight:	33 lbs (15.0 kg)
Shipping Weight:	36.4 lbs (16.5 kg)

Asia & Pacific Rim—Headquarter Asia

Singapore: Telex Pte. Ltd.
3015A Ubi Road 1,
05-10 Kampong Ubi Industrial Estate,
Singapore 408705
Phone: +65 6746-8760, Fax: +65 6746-1206

Japan: EVI Audio Japan Ltd.
5-3-8 Funabashi, Setagaya-Ku,
Tokyo, Japan 156-0055
Phone: +81 3-5316-5020,
Fax: +81 3-5316-5031

Hong Kong: Telex EVI Audio (HK) Ltd.
Unit 5,1/F, Topsail Plaza
11 On Shum Street
Shek Mun, Shatin HK
Phone: +852 2351-3628, Fax: +852 2351-3329

China: Telex EVI Audio (Shanghai) Ltd.
Room 2210-2215,
Tower B, Far East International Plaza,
No. 317, Xianxia Road,
Shanghai, China, PC: 200051
Phone: +86 21-6235-1677
Fax: +86 21-6235-1676

