
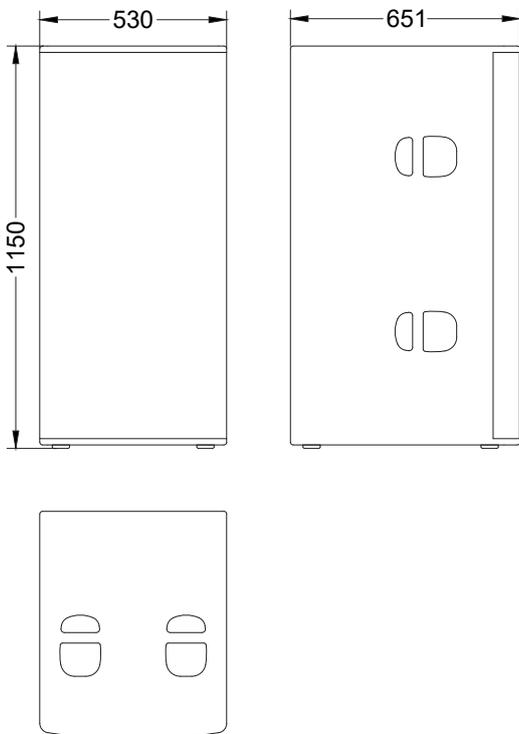


SUB 28

PASSIVE SUBWOOFER

Subwoofer series takes advantage of tremendous experience in touring, installation and mobile markets. Cabinets are equipped with next-generation transducers with reinforced moving system capable of withstanding tremendous pressure and excursion while keeping distortion in check.

Sub 28 is a dual 18" high power passive subwoofer for mid sized venues, concert halls and clubs. With extended enclosure volume and long-excursion transducers, it is easily tunable to fit in many varieties of installations.

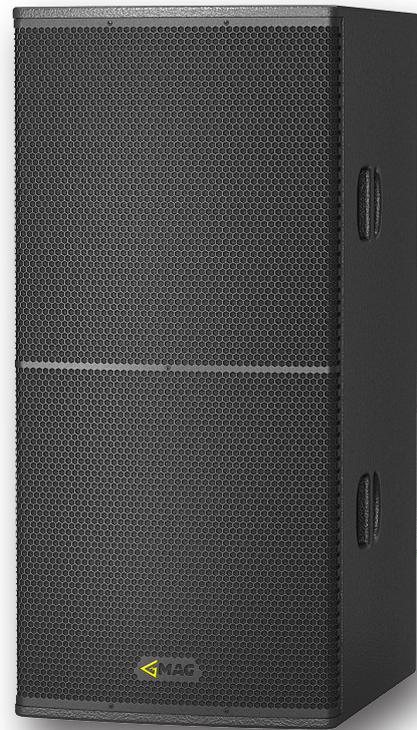

Main features:

- 2600W nominal power
- Two 18" woofers with 4" voice coil
- Efficient vented box design
- 143 dB Max SPL
- M20 distance pole adapter

Frequency Response (-10dB)	30 - 220 Hz
Max SPL ¹	143 dB
Sensitivity (1W/1m)	100 dB
LF Driver	2x18", 4" VC
Impedance	4 Ohm
Nominal power ²	2600 W
Connectors	2x NeutrikSpeakon
Dimensions (W×H×D), mm	530x1150x651 mm
Net weight, kg	78 kg
Shipping weight, kg	81 kg
Enclosure material	Plywood; wear-resistant paint
Grill	Steel grill, acoustically transparent foam

¹ - peak value, calculated according to AES 2 - 2012

² - based on transducer power measured according to AES 2 - 2012