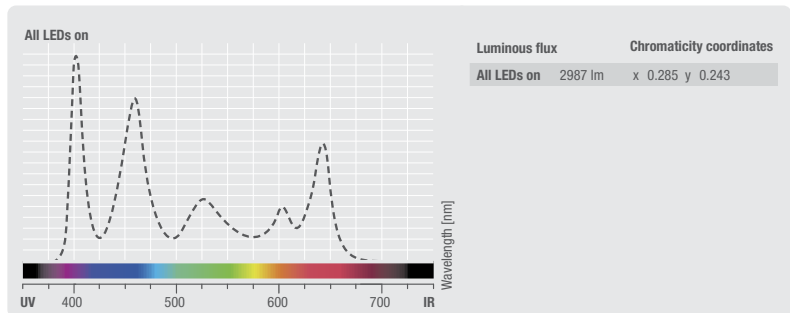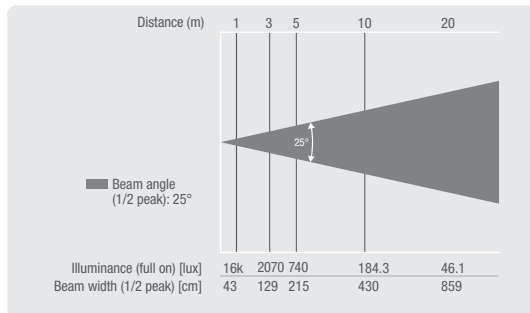# PAR 64 CAN RGBWA+ UV 10 WBS / WPS

12 x 10W 6-IN-1 LED RGBWA+UV PAR LIGHT IN BLACK OR POLISHED HOUSING

▸ **12 x 10 W Ultra High Power 6 in 1 RGBAW+UV LEDs**
▸ **Highest flexibility for perfect mixing of solid and pastel colours to warm rich colours and ultra violet**
▸ **Flicker Free**
▸ **Operated via DMX, in master/slave Mode or standalone Mode**
▸ **Integrated microphone for sound control**
▸ **Simple to operate using the four buttons and LED Display**
▸ **Double brackets included as standard**
▸ **Rugged compact aluminum housing**

PHOTOMETRICAL DATA

Distance (m)	1	3	5	10	20
Beam angle (1/2 peak): 25°					
Illuminance (full on) [lux]	16k	2070	740	184.3	46.1
Beam width (1/2 peak) [cm]	43	129	215	430	859

All LEDs on

Luminous flux	Chromaticity coordinates
All LEDs on 2987 lm	x 0.285 y 0.243

UV 400 500 600 700 IR
Wavelength [nm]

LED TECHNOLOGY | 512 DMX | MASTER/SLAVE | SOUND TO LIGHT | STAND ALONE MODE | GREEN SOLUTION | STROBE EFFECT | 6 IN 1 LED | UV

SPECIFICATIONS

Product Number:	CLP64RGBWAU10WBS / CLP64RGBWAU10WPS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBWA+UV
Number Of LEDs:	12
LED Type:	10 W 6 in 1 colour
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3-Ch-1, 3-Ch-2, 2, 6, 9-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGBWA+UV, Sound Control, Colour Jump, Strobe
Standalone Modes:	Colour Fade, Colour Macro, Colour Jump, Master / Slave Mode, Sound Control, Static Colour

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	Backlit LCD
Operating Voltage:	100 V AC - 240 V AC, 50 - 60Hz
Power Consumption:	120 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Fan
Illuminance:	16,000 lx @ 1m
Dimensions (W x H x L):	260 x 280 x 300 mm
Weight:	3.7 kg